



Apollo


Mobile Robot



Improve safety, efficiency, productivity, and patient care while cutting operational costs



- 1 - Drawers
- 2 - Laser scanner
- 3 - Plastic (painted) or E-glass (painted) cover
- 4 - Covered Manual control
- 5 - Flashing lights
- 6 - E-stop
- 7 - 10.1" Touch Screen Display

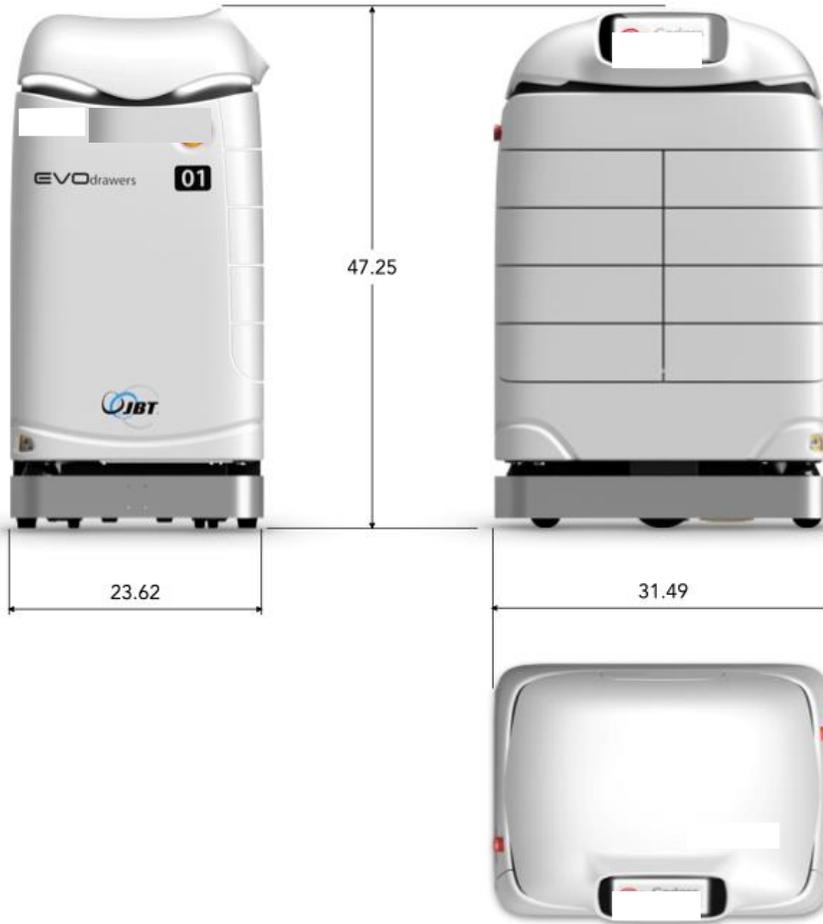

SPECIFICATIONS

Dimensions & Weight	Vehicle Size	L: 31.5" ; W: 23.6" ; H: 39.4"
	Vehicle weight w/out batteries	551.2 lbs.
Payloads & Requirements	Maximum payload	330.7 lbs.
	Payload max size	440.9 lbs.
Performance	Kinematics and Drive	Differential and Bidirectional
	Speed	197 FPM min/max
Materials	Chassis material	AISI 304
	Shell material	Composite
Communication	WI-FI - WLAN 802.11a/b/g/n - 2,4/5 GHz	
Safety	Safety devices	Nr. 2 Sick S300 laser scanners ; N.2 E-stop buttons ; Safety control central unit Sick Flexi
	Performance level	d
	Safety field shape	Boxes: 360°
	Video camera	
Environment	Temperature	From 41 to 95 °F
	Working relative humidity	From 30% to 80% (absence of condensation)