
Low Profile AGV



DATA SHEET




FEATURES

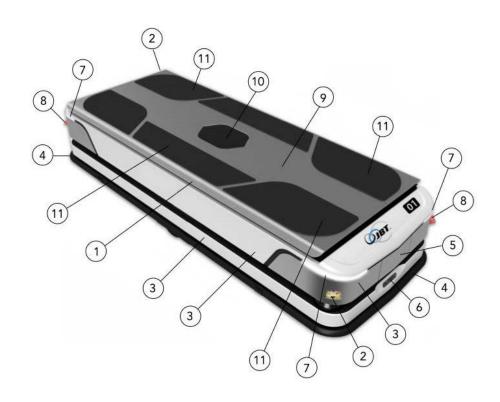

- 1 Self-alignment for trolleys
- 2 Laser scanner
- 3 Carbon+Kevlar® (painted) or E-glass (painted) cover
- 4 Sensitive profile
- 5 Covered Manual control
- 6 3D camera
- 7 Flashing lights
- 8 E-stop
- 9 Stainless steel lift cover
- 10 RFID reader
- 11 Grip surface



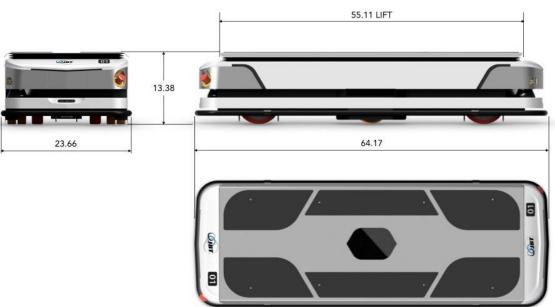

SPECIFICATIONS

3r LCII ICATIONS		
Dimensions & Weight	Vehicle Size	L = 64.2" W = 23.7" H =13.4"
	Vehicle weight w/out batteries	551.2 lbs.
Payloads & Requirements	Maximum payload	1200 lbs.
	Payload max size	W= 35.4" L= 50"
Performance	Kinematics and Drive	Diamond, Bidirectional
	Speed	196.9 fpm 354.3 fpm
Materials	Chassis material	AISI 304
	Shell material	Carbon+Kelvar
Communication	WI-FI - WLAN 802.11a/b/g/n - 2,4/5 GHz	
Safety	Safety devices	Sick Microsan3 9m
	Performance level	d
	Safety field shape	360° w/o payload – 180° front/rear with payload
	Video camera	Camera 3D Intel D435i
Environment	Temperature	41°F to 95°F
	Working relative humidity	from 30% to 80%

Toll Free: +1 888 362 3628 Email: sgv.sales@jbtc.com Phone: +1 215 822 4600 Website : jbtc.com