


Stein DB-4Xtra Drum Breader

Specifications

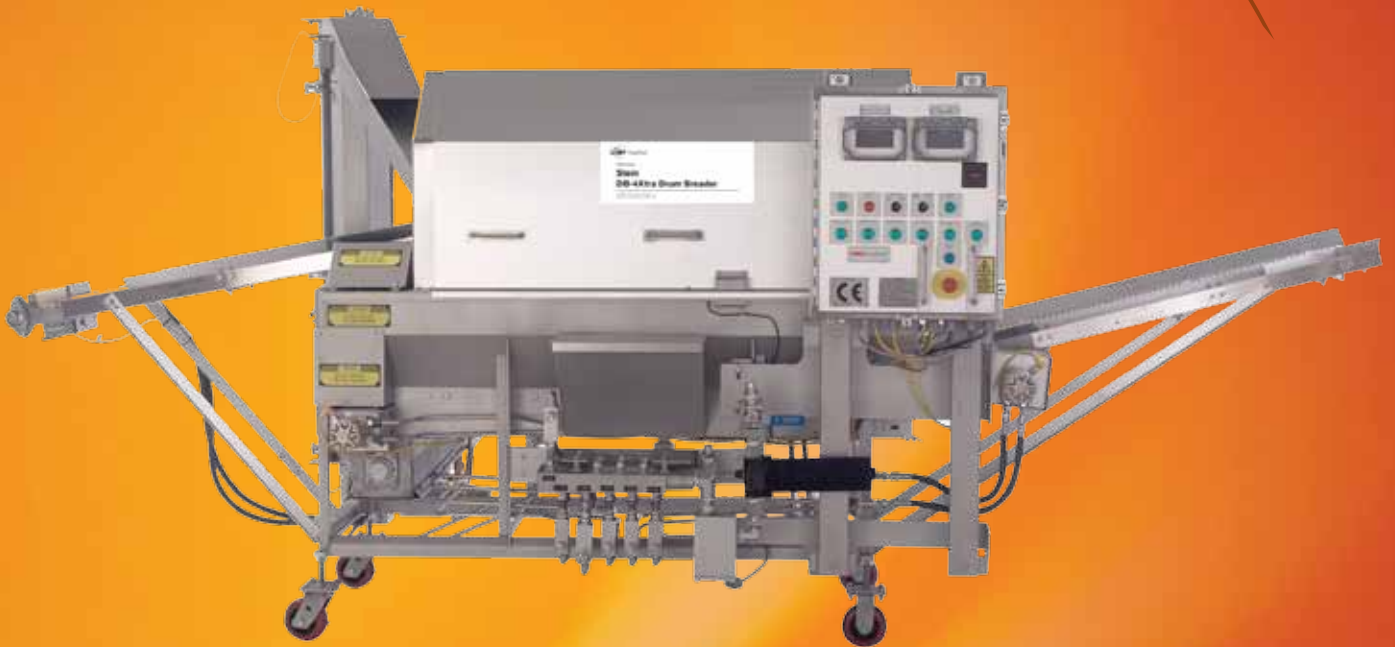

Stein DB-4Xtra Drum Breader

This new drum breader was uniquely designed for products with a home-style look. It can be used as a pre-duster or as a final breader with flour coating during double or triple pass. The DB-4Xtra has quick start up and offers a process with a high degree of repeatability, accuracy and better process control.

- Handles a variety of products with irregular shapes
 - Bone-in poultry such as wings
 - Vegetables such as mushrooms and cauliflower
 - Soft, pliable products such as shrimp, clam strips, boneless chicken strips and Calamari
- For products that are difficult to transfer from belt-to-belt
- Hydraulic and Electric versions



The open frame design with no hollow structures results in easier access and sanitation

The DB-4Xtra rotary drum breader applies a uniform layer of flour or free-flowing breading to any product that can tolerate a gentle tumbling action.

- Drum is tilted so tumbled product is moved toward the discharge end where excess breading is removed before transferring it to the discharge conveyor
- Rotational speed and the drum angle are variable so that dwell time in the breading and the amount of tumbling can be best suited to a particular product.



Control Box
Hydraulic model: digital readouts for vertical screw, infeed discharge and drum speeds.

Electric model: controls have changed to VFD (vertical frequency drives). This allows speed readouts for the infeed and discharge conveyors, vertical screw and drum rotation motor



Nickel Coated Hydraulic Motors
Withstands harsh environments



Crumb Box and Sifter
Conveyor with E-Stop

Operations

Bulk products can be loaded on the DB-4Xtra infeed conveyor which delivers product directly to the drum section. It then gently tumbles with products and coats them with flour style breadings.

- Each piece comes out of the drum with a uniform pre-dust which makes it easier to handle and facilitates belt loading and product re-orientation in preparation for the next coating step
- Once products are coated with pre-dust and batter they can be coated again with another layer of flour. This uniform layer initiates a home style look
- Pick-up varies depending on the number of coating passes
- Excess breading drops through a mesh opening at the discharge end of the drum while coated product is dropped onto the discharge conveyor extension
- Coating re-circulation is maintained with special cross-feed and vertical augers delivering a steady flow of coating material into the drum at the infeed end



Auger Housing

A change in the geometry of the auger housing eliminates flour leakage, flour clogging in the auger and promotes better flour circulation



Chute

The steeper angle of the chute eliminates flour clogging in the auger and delivers better flour distribution across the surface of the products



Drum

Drum with open enclosure makes cleaning and accessibility easier



Direct drive coupling



Discharge Conveyor and Hydraulic Drive

Discharge conveyor has side plates to prevent products from falling off conveyor



Access Door

Access door opens to allow easy access and inspection of return conveyor





DB-4Xtra Handles A Variety of Irregular Shapes

- Bone in poultry such as wings
- Vegetables such as mushrooms and cauliflower
- Soft, pliable products:
 - Shrimp
 - Clam Strips
 - Boneless Chicken Strips
 - Calamari
 - Popcorn Chicken



Stein DB-4Xtra Specifications

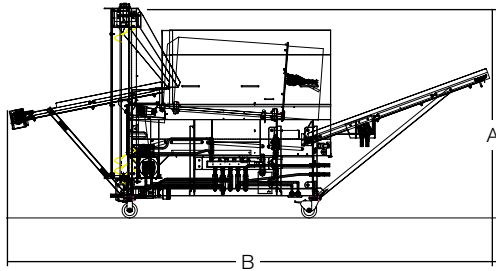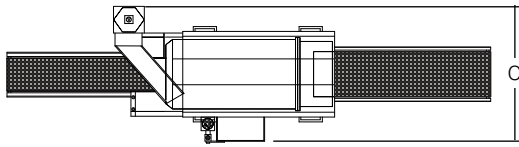

Model		DB-4Xtra	
A. Height	mm in	1794-1896 71-75	
B. Length	mm in	4013 158	
C. Width	mm in	1473 64	
Breeding hopper capacity	kg	23-59	
conveyor floor	lbs	50-130	
Conveyor Belt			
Breeding return	SS flat flex 1/2" P x .072	mm in	508 20
Infeed	SS mesh 30-30-16	mm in	279 11
Discharge	SS mesh 30-30-16	mm in	355 14
Sifter	SS flat flex 3/8" P x .050	mm in	152 6
Belt Speed			
Infeed	m/min ft/min	Adj 4.5-9 Adj 15-30	
Discharge	m/min ft/min	7.6 25	
Product infeed height	mm in	839-941 33-37	
Product discharge height	mm in	1194-1295 47-51	
Electric drop location (from infeed end)	mm in	1778 70	
Hydraulic drop location (from infeed end)	Pressure	mm in	2226 88
	Return	mm in	2114 83
Electric Drive			
Available Voltages	230 v/3 PH/60 Hz 460 v/3 PH/60 Hz 415 v/3 PH/50 Hz	380 v/3 PH/60 Hz 380 v/3 PH/50 Hz 575 v/3 PH/60 Hz	

Motor Specifications	ELECTRIC @ 460 v/3/60 Hz		ELECTRIC @ 380 - 415 v/3/50 Hz		HYDRAULIC @ 900 psi	
	kW	RPM	kW	RPM	I/min	RPM
Crossfeed screw	Hp	56	0.56	93	13	125
	Amps	1.5	1.8		3.4	
					GPM	
Vertical screw	kW	1.125	1.12		25.4	
	RPM	192	160		250	
	Hp	1.5	2.8		6.7	
	Amps	2.6				
Drum + belt	kW	1.125	1.12		11.8	
	RPM	98	81		167	
	Hp	1.5	2.8		3.1	
	Amps	2.6				
Infeed conveyor	kW	.56	0.56		5.3	
	ft/min	23-30	19-25		10-60	
	m/min	7-9	5.8-7.5		3-18	
	Hp	.75	1.8		1.4	
	Amps	1.5				
					GPM	
Discharge conveyor	kW	.55	.56		5.3	
	ft/min	26			10-60	
	m/min	8			3-18	
	Hp	.75	1.8		1.4	
Amps	1.5					
Sifter conveyor	RPM	40			2.3	
	Amps	.39	.4		.6	
	kW	.12	1			
	Hp	.16				
Total hyd. consumption					I/min	63
					GPM	17
Crating Dimensions						
Length	mm	4115	mm	4115	mm	4115
	in	162	in	162	in	162
Width	mm	1651	mm	1651	mm	1651
	in	71	in	71	in	71
Height	mm	1930	mm	1930	mm	1930
	in	76	in	76	in	76
Gross shipping weight	kg	772	kg	772	kg	772
	lbs	1700	lbs	1700	lbs	1700
Noise levels	to be determined		to be determined		to be determined	
Maximum hydraulic working pressure						900 psi
Utility Drawings	U012-01-1237			U012-01-1189		

Specifications subject to change without notice. Please corroborate with Stein sales support in your region



We are your single source for profitable processing solutions

JBT FoodTech can provide you with portioners, freezers, and everything in between – including process control, food product development assistance, operator training and a full range of customer support alternatives.

Our Food Technology Centers have served leading processors in the development of many of the world's most popular food brands. Learn how to increase your processing potential by contacting your JBT FoodTech representative or by visiting our website.

We're with you right down the line.™

www.jbtfoodtech.com



www.jbtfoodtech.com

North America

JBT FoodTech
1622 First Street
Sandusky, OH 44870
USA
Phone +1 419 626 0304
Fax +1 419 626 9560
frigostein.info@jbt.com

Asia

John Bean Technologies
Singapore Pte Ltd
20 Harbour Drive
#04-02 PSA Vista
Singapore 117612
Tel : +65 67766220
Fax: +65 67766229
infoasia-jbtfoodtech@jbt.com

Europe

JBT FoodTech
Rusthallsgratan 21, Box 913
SE-251 09 Helsingborg
SWEDEN
Phone +46 42 490 4000
Fax +46 42 490 4040
corporate@jbt.com

Latin America

John Bean Technologies
Máq. Equip. Ind. Ltda.
Av Eng Luis Carlos Berrini, 1461
9th Floor – Brooklin
04571-903 Sao Paulo BRAZIL
Phone + 55 11 3055 1010
Fax +55 11 3055 1030
latinamerica.info@jbt.com