




TURKEY GIZZARD PROCESSOR

Model: TGP-2



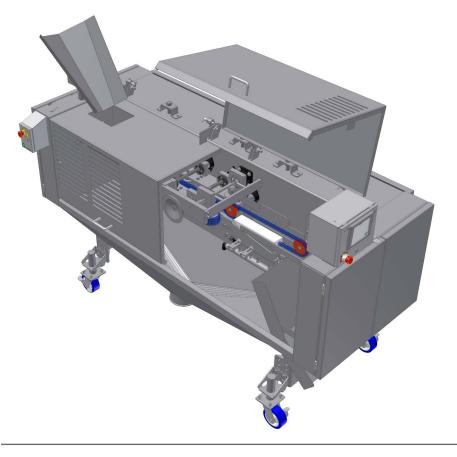

"Long-Cut" Split Gizzard Example



TGP-2 Infeed View

The TGP-2 Turkey Gizzard Processor is a durable, multi-phase gizzard processing unit capable of automatically splitting and rinsing 40 turkey tom gizzards per minute, or up to 50 turkey hen gizzards per minute. A high-pressure water knife cuts cleanly and eliminates the need for costly blade replacement.

See Prime in action: View www.PrimeEquipmentGroup.com/videos

Viewing online? Click here SPLITS AND RINSES GIZZARDS

DELIVERS CONSISTENT BUTTERFLY CUT

IMPROVE CUT QUALITY AND GIZZARD

PROCESSING EFFICIENCY

SMALL MACHINE FOOTPRINT INTEGRATES WITH OPERATION




PRIME ROI:

REDUCE MANUAL GIZZARD PROCESSING LABOR
AIR KNIFE ELIMINATES COSTLY BLADE REPLACEMENTS,
REDUCES MAINTENANCE COSTS AND DOWNTIME
















TURKEY GIZZARD PROCESSOR

Model: TGP-2

R.H. PRIME TURKEY GIZZARD PROCESSOR (MODEL TGP-2) EQUIPPED WITH HIGH PRESSURE WATER KNIFE CUTTER (PORTABLE HIGH PRESSURE PUMP STATION SHOWN)



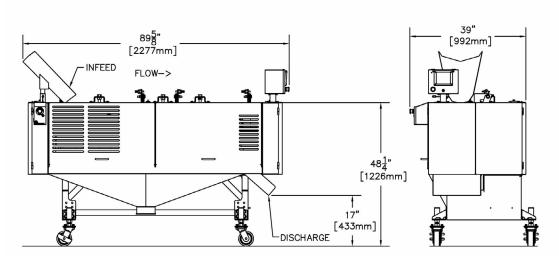



TECHNICAL SPECIFICATIONS

PRODUCTION RATES

Electrical Requirements:	(1) 2 hp motor; 480V, 3 ph, 60 Hz, 30 amps	Turkey Gizzards, Tom:	Up to 40 per minute
Water Requirements:	(1) 3/4", (1) 1" connection; 10.0 GPM (37.85 LPM); 40-80 PSI	Turkey Gizzards, Hen:	Up to 50 per minute
Pump Requirements:	See pump details below.		
High-pressure splitter pump:	(1) 7.5 hp motor; 230/460V, 3 hp, 60 Hz - (3.0 GPM)		
Low-pressure flush pump	(1) 3/4 hp motor; 230/460V. 3 ph, 60 Hz - (8.0 GPM)		
Net Weight:	550 lbs. (249 kg)	Email us for a sample layout	

NOTE: Specifications are accurate at time of publication







